BARDOLINE® CLASSIC

Quality shingles for original roof.

A perfect solution for all types of roofs.
Do you feel the need to liven up your new garden shed? With BARDOLINE® you can do it fast, easily and reliably! Try it, you will be amazed!

"Our new garden shed came with a really thin black felt roof, so we decided to use BARDOLINE®. My wife chose shape and color, and I installed it in a few hours. Now everything is looking good."

Smith family

Bungalow

Carport

WOULD YOU LIKE TO DISCOVER MORE about ONDULINE®?

Please visit our website at
www.onduline.com

Download and open barcode scanner application. Point your phone's camera at this code and scan.

Onduline

Onduline®
35, rue Baudin
92300 Levallois-Perret, FRANCE
www.onduline.com

Recycled Content Verified by ICC ES SAVE See ICC-ES VAR-1016

Onduline French limited liability company with managing board and supervisory board, share capital of €11,323,485.05 - R.C.S. Nanterre 552 088 361

Agency DNArt France – 83031OSA – 12/2013 – Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.

BARDOLINE® CLASSIC

Quality shingles for original roof.

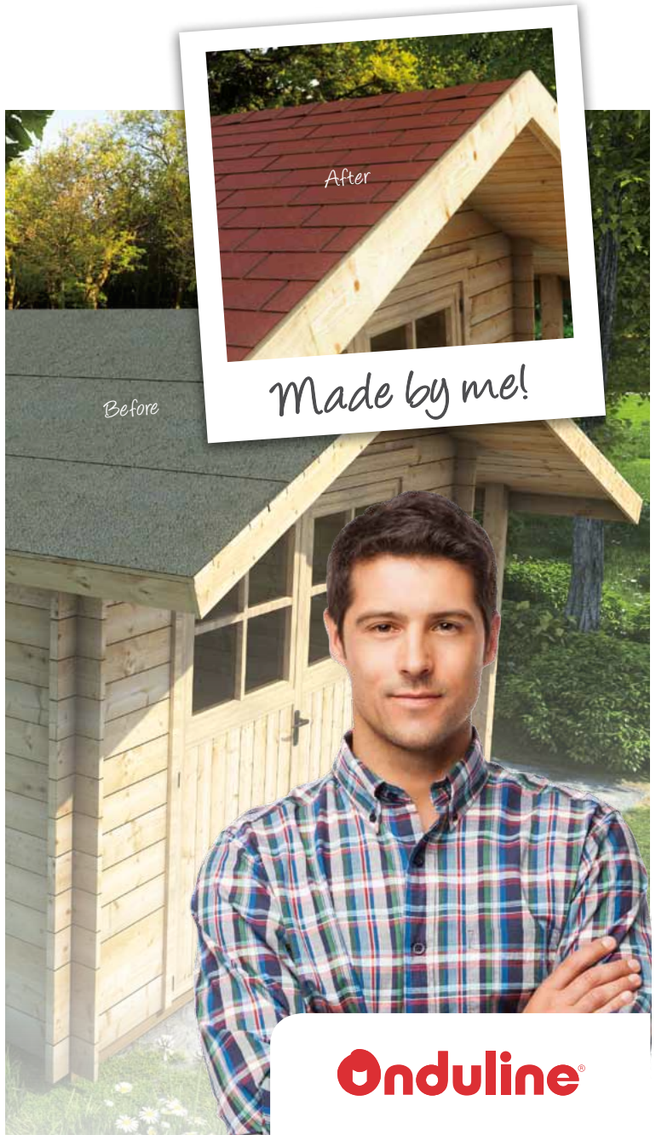

Onduline

BARDOLINE® CLASSIC

Quality shingles for original roof.

BARDOLINE® shingles come in a wide range of excellent options to create a waterproof, durable, and appealing roof. BARDOLINE® is easy to apply on all types of structures.

BENEFITS

- AESTHETIC
- WATERTIGHT
- EASY TO FIX
- IMPACT RESISTANT

Toll shelter

Garden shed

SHAPE AND COLOR RANGE

Three different models to meet your needs

RECTANGULAR

BEAVER

TRIANGULAR

TECHNICAL CHARACTERISTICS

Length	100 cm
Width	34 cm
Tiles per m²	7 pcs
Weight per m²	9,4 kg

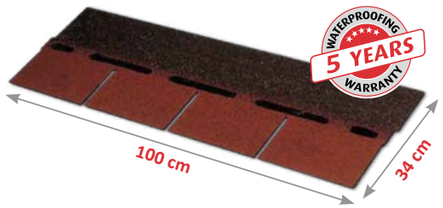

INSTALLATION INSTRUCTIONS

Follow these instructions to ensure a professional result.

1 SUPPORT AND THE 1ST TILE ROW

Installation is done on full wooden decking only (thickness >24 mm). For pitches < 35% is recommended to install a previous protection layer. Prepare base course cutting lengthways tile tabs. The eaves course is then bonded to the adhesive tabs of the base course.

2 FIXING

Use five 20 mm large headed galvanised nails per shingle. Nail through strip centre band and into the top edge of the lower course.

3 INSTALLATION BASIC RULE

If needed shorten the first left (or right) strip by half a tab. On completion check the tile bonding, use adhesive to reinforce laps as required.

4 RIDGE

4a

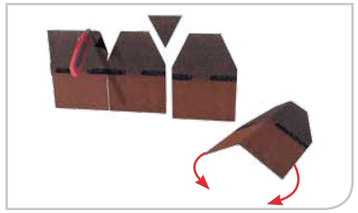

4b

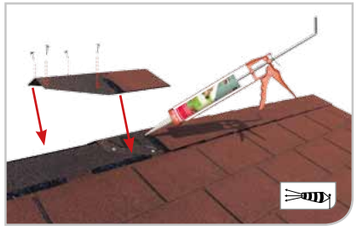

To complete the ridge line, start always cutting shingles to make the ridge (**see 4a**). Make sure that the bitumen shingles are sufficiently covered on both sides of the roof. The direction of the overlap is made in the opposite direction to prevailing winds (**see 4b**).

5 JOB COMPLETED

BARDOLINE® shingles provide an attractive, colored and long lasting finishing to a wide variety of garden buildings.

ACCESSORIES

BARDOLINE® nails
Length:
20 mm

ONDUMASTIC
Content:
310 ml

USEFUL INFO

HOW TO CUT AND TRIM YOUR PRODUCT

You can easily cut your tiles with a cutter.

USE THE APPROPRIATE QUANTITY OF FIXINGS

Approximately 35 nails/m²

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$



Minimum pitch required: 20%